


Loft V


DESIGN ANDREA CROSETTA



Kcal = Watt x 0.860
BTU = Watt x 3.413


Watt Δt 60° = Watt Δt 50° x 1.283
Watt Δt 40° = Watt Δt 50° x 0.737
Watt Δt 30° = Watt Δt 50° x 0.497
Watt Δt 20° = Watt Δt 50° x 0.285

p max = 6.5 bar

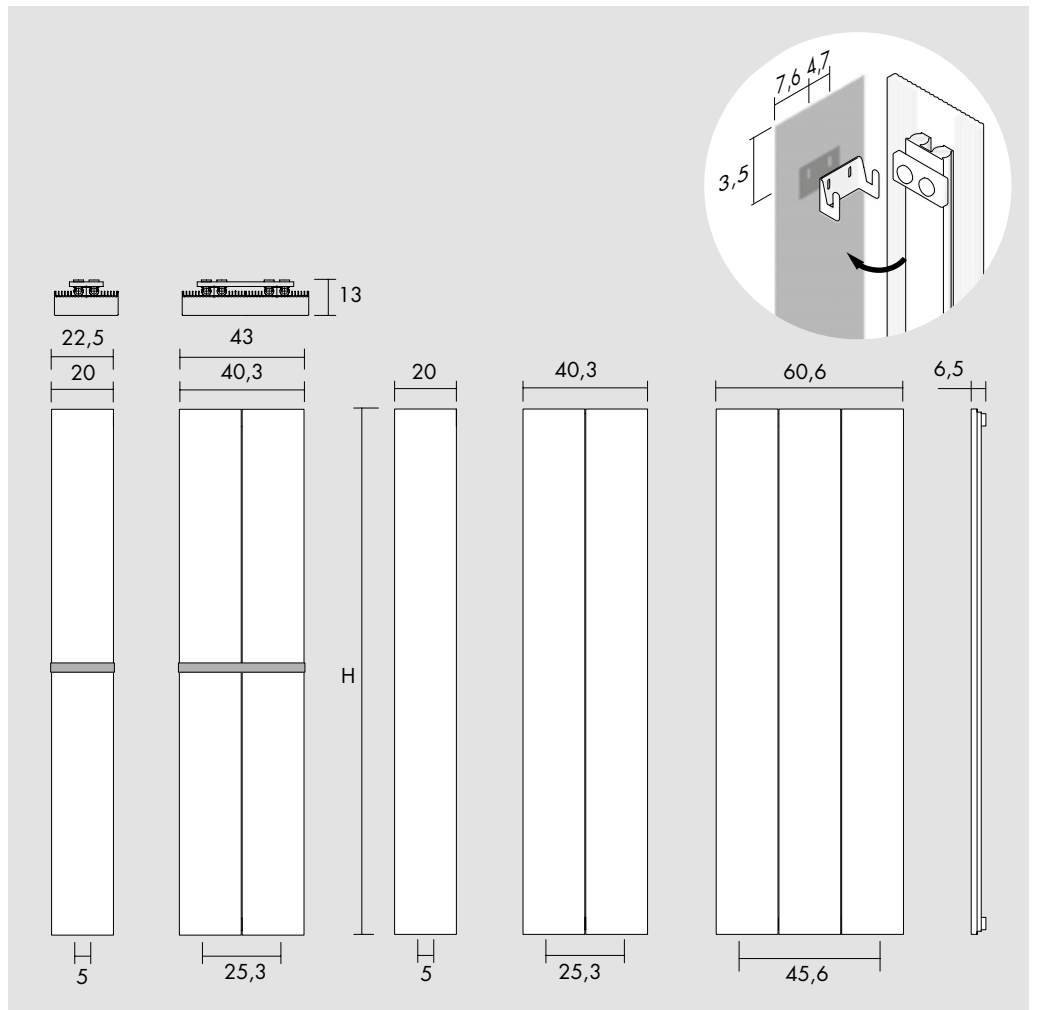


[F]

Standard connection / Raccord standard
Standard Anschluss / Conexión estándar

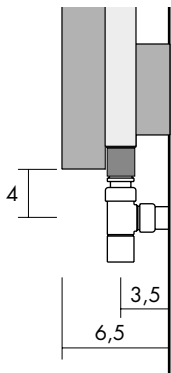

[H]

Special connection / Raccord spéciale / Speziell Anschluss / Conexión especial

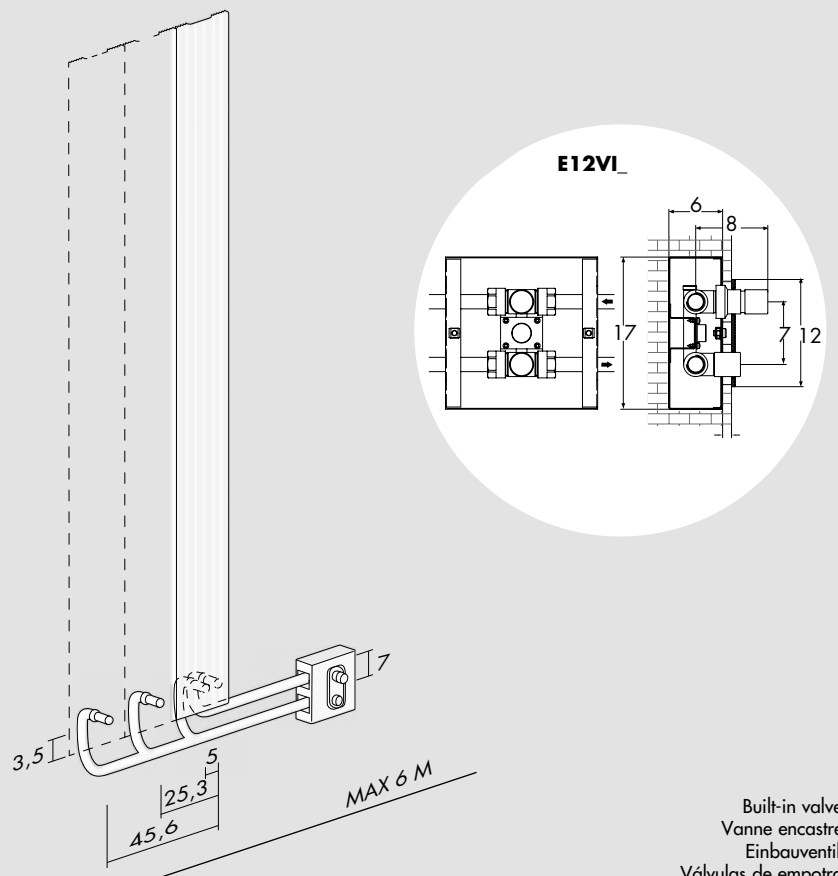

Built-in valves
Vanne encastrer
Einbauventile
Válvulas de empotrar

Loft V

H cm	L cm	I* cm	art*	Lt*	watt Δt 30°	watt Δt 50°
150.0	20.0	5.0	LFV150001_	1.1	167	336
150.0	40.3	25.3	LFV150002_	2.2	334	672
150.0	60.6	45.6	LFV150003_	3.4	501	1 008
170.0	20.0	5.0	LFV170001_	1.2	185	373
170.0	40.3	25.3	LFV170002_	2.5	371	746
170.0	60.6	45.6	LFV170003_	3.8	557	1 120
200.0	20.0	5.0	LFV200001_	1.4	218	439
200.0	40.3	25.3	LFV200002_	2.9	436	878
200.0	60.6	45.6	LFV200003_	4.3	655	1 317

Loft V Aluc

Aluminium radiator in polished
 Radiateur en aluminium poli
 Heizkörper aus poliertem Aluminium
 Radiador en aluminio pulido



H cm	L cm	I* cm	art*	Lt*	watt Δt 30°	watt Δt 50°
150.0	20.0	5.0	LFV150001_	1.1	108	218
150.0	40.3	25.3	LFV150002_	2.2	215	433
150.0	60.6	45.6	LFV150003_	3.4	326	655
170.0	20.0	5.0	LFV170001_	1.2	121	243
170.0	40.3	25.3	LFV170002_	2.5	241	485
170.0	60.6	45.6	LFV170003_	3.8	362	728
200.0	20.0	5.0	LFV200001_	1.4	142	285
200.0	40.3	25.3	LFV200002_	2.9	284	571
200.0	60.6	45.6	LFV200003_	4.3	425	856

Optional



Reverse Valve
 Vanne reverse
 Reverse Ventil
 Válvula a escuadra inversa

[BIAN] **E12RVB**
 [CROM] **E12RVR**




Built-in valves
 Vanne encastrer
 Einbauventile
 Válvulas de empotrar

[BIAN] **E12VIB**
 [CROM] **E12VIR**





Thermostatic head
 Tête thermostatique
 Thermostatkopf
 Cabezal termostático

[BIAN] **TTB**
 [CROM] **TTR**



Sleeving kit
 Kit couvre tuyau
 Rosetten
 Kit cubre tubo

[BIAN] **C5B**
 [CROM] **C5R**




Towel bar
 Porte-serviettes
 Handtuchhalter
 Porta toallas

22 cm
 [CROM] **ML22R**
 [COLOUR] **ML22C**
 [GOLD] **ML22G**

42 cm
 [CROM] **ML42R**
 [COLOUR] **ML42C**
 [GOLD] **ML42G**

Loft O


DESIGN ANDREA CROSETTA



Kcal = Watt x 0.860
BTU = Watt x 3.413


Watt Δt 60° = Watt Δt 50° x 1.283
Watt Δt 40° = Watt Δt 50° x 0.737
Watt Δt 30° = Watt Δt 50° x 0.497
Watt Δt 20° = Watt Δt 50° x 0.285

p max = 6.5 bar

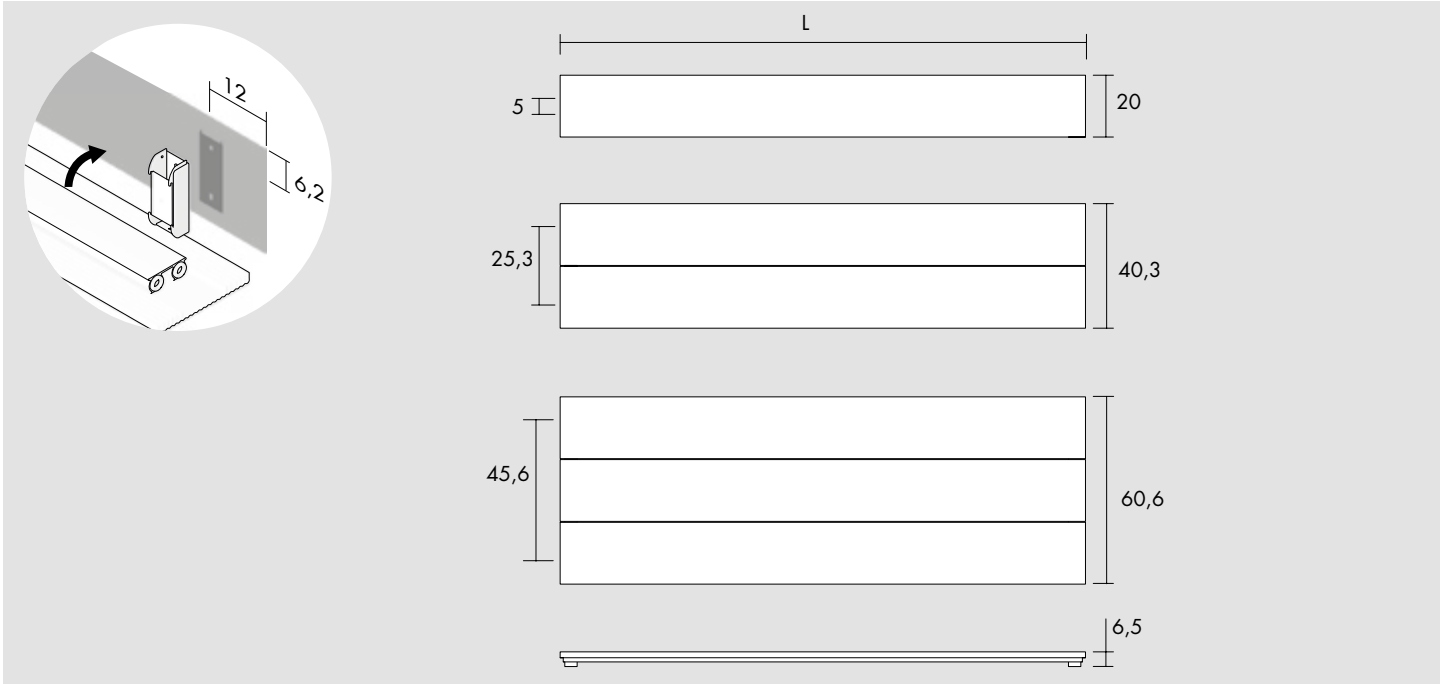


[F]

Standard connection / Raccord standard
Standard Anschluss / Conexión estándar

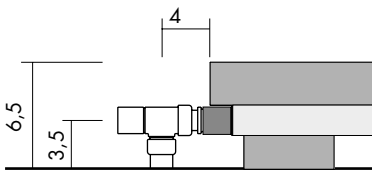

[H]

Special connection / Raccord spéciale / Speziell Anschluss / Conexión especial

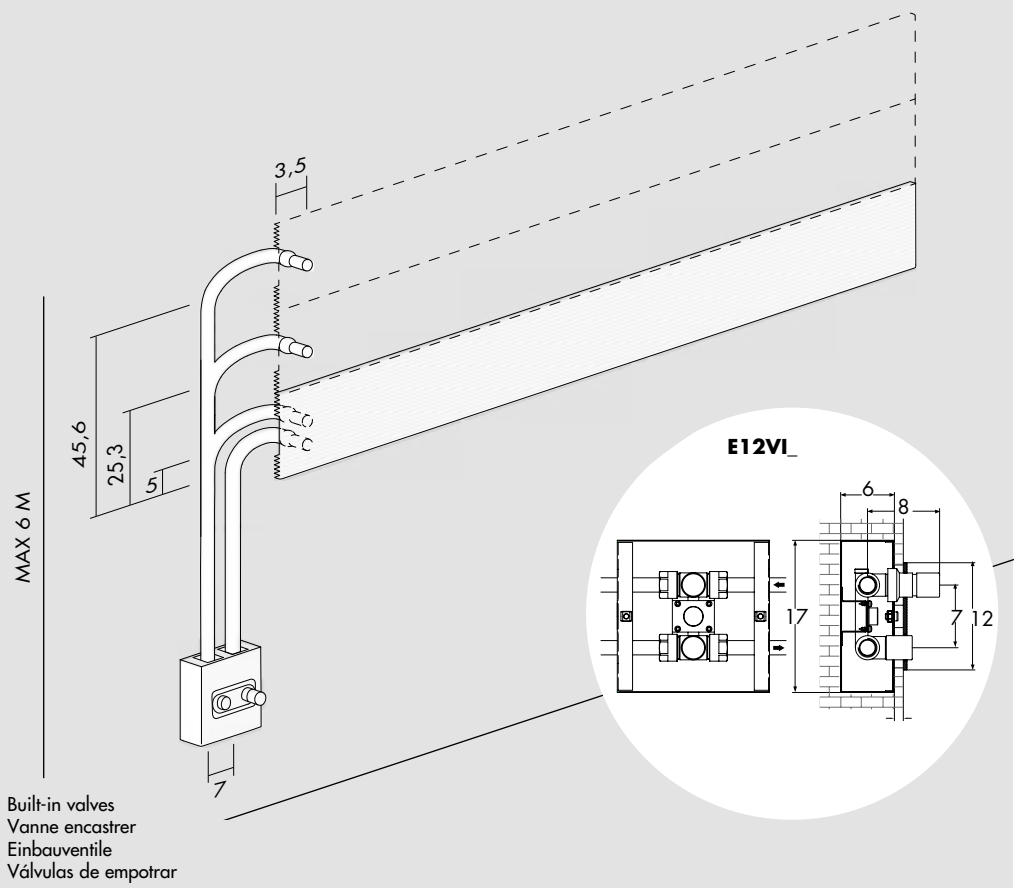

Loft O

H cm	L cm	I* cm	art*	Lt*	watt Δt 30°	watt Δt 50°
20.0	150.0	5.0	LFO150001_	1.1	167	336
40.3	150.0	25.3	LFO150002_	2.2	334	672
60.6	150.0	45.6	LFO150003_	3.4	501	1 008
20.0	170.0	5.0	LFO170001_	1.2	185	373
40.3	170.0	25.3	LFO170002_	2.5	371	746
60.6	170.0	45.6	LFO170003_	3.8	557	1 120
20.0	200.0	5.0	LFO200001_	1.4	218	439
40.3	200.0	25.3	LFO200002_	2.9	436	878
60.6	200.0	45.6	LFO200003_	4.3	655	1 317

Loft O Aluc

Aluminium radiator in polished
 Radiateur en aluminium poli
 Heizkörper aus poliertem Aluminium
 Radiador en aluminio pulido



H cm	L cm	I* cm	art*	Lt*	watt Δt 30°	watt Δt 50°
20.0	150.0	5.0	LFO150001_	1.1	108	218
40.3	150.0	25.3	LFO150002_	2.2	215	433
60.6	150.0	45.6	LFO150003_	3.4	326	655
20.0	170.0	5.0	LFO170001_	1.2	121	243
40.3	170.0	25.3	LFO170002_	2.5	241	485
60.6	170.0	45.6	LFO170003_	3.8	362	728
20.0	200.0	5.0	LFO200001_	1.4	142	285
40.3	200.0	25.3	LFO200002_	2.9	284	571
60.6	200.0	45.6	LFO200003_	4.3	425	856

Optional



Reverse Valve
 Vanne reverse
 Reverse Ventil
 Válvula a escuadra inversa

[BIAN] **E12RVB**
 [CROM] **E12RVR**




Built-in valves
 Vanne encastrer
 Einbauventil
 Válvulas de empotrar

[BIAN] **E12VIB**
 [CROM] **E12VIR**




Thermostatic head
 Tête thermostatique
 Thermostatkopf
 Cabezal termostático

[BIAN] **TTB**
 [CROM] **TTR**



Sleeving kit
 Kit couvre tuyau
 Rosetten
 Kit cubre tubo


[BIAN] **C5B**
 [CROM] **C5R**



$\varnothing \leq 16$ mm
 [BIAN] **CTB**
 [CROM] **CTR**

$16 \text{ mm} < \varnothing < 24$ mm
 [BIAN] **CWB**
 [CROM] **CWR**

art* = item / modèle / Artikel / artículo **I*** = pipe centres / distance entre depart et retour / Achsabstand / distancia entre las conexiones
Lt* = water content for each element / volume d'eau pour chaque element / Wassergehalt für Element / contenido de agua por cada elemento
P* = page / page / Seite / página

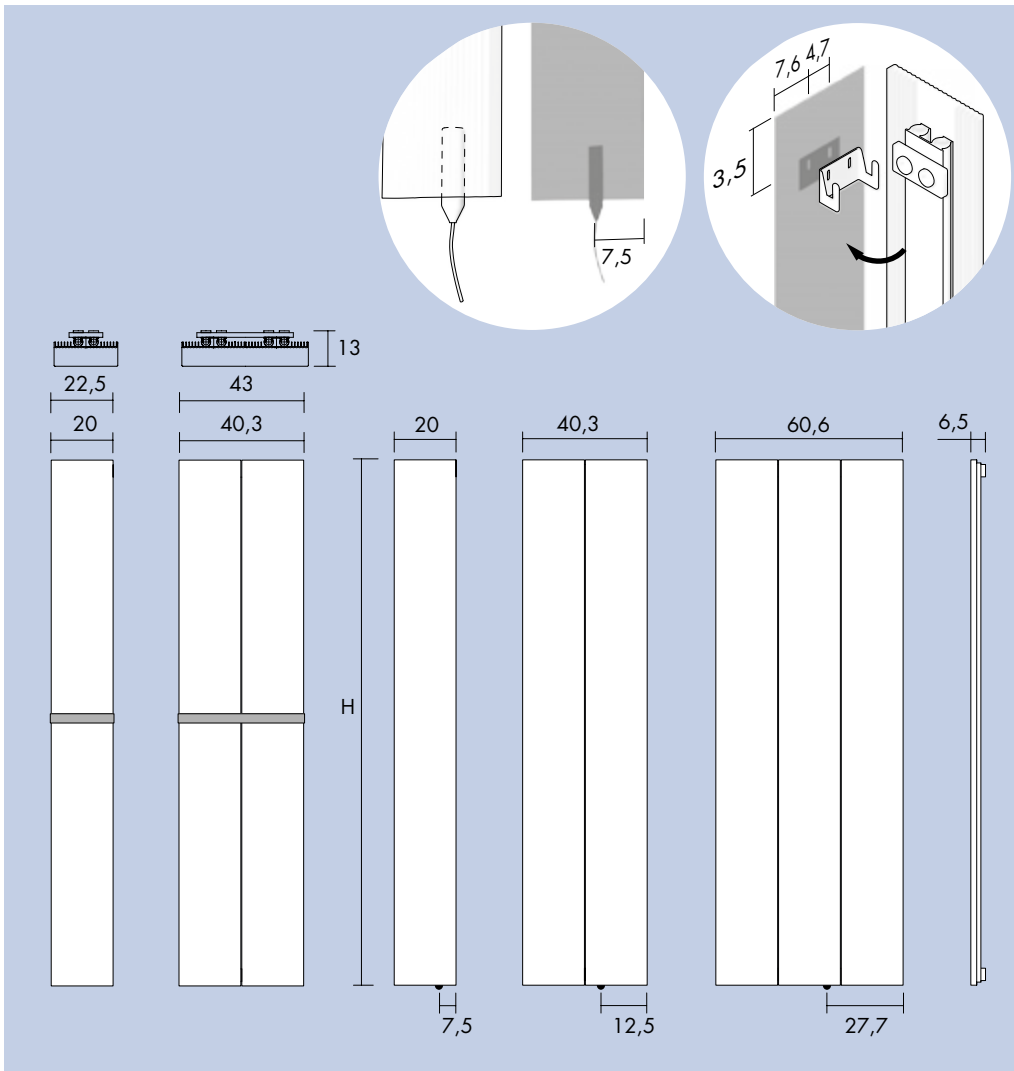

H cm	L cm	art*	watt	watt
150.0	20.0	EC Lfv150001_	200	200
150.0	40.3	EC Lfv150002_	500	300
150.0	60.6	EC Lfv150003_	700	500
170.0	20.0	EC Lfv170001_	250	250
170.0	40.3	EC Lfv170002_	600	300
170.0	60.6	EC Lfv170003_	700	500
200.0	20.0	EC Lfv200001_	300	200
200.0	40.3	EC Lfv200002_	700	400
200.0	60.6	EC Lfv200003_	900	700

Optional



Receiver
Récepteur
Empfänger
Receptor

R10



Digital chronothermostat
Chronothermostat digital
Der digital Chronothermostat
Cronotermostato digital

T10



Towel bar
Porte-serviettes
Handtuchhalter
Porta toallas

22 cm
[CROM] **ML22R**
[COLOUR] **ML22C**
[GOLD] **ML22G**

42 cm
[CROM] **ML42R**
[COLOUR] **ML42C**
[GOLD] **ML42G**