


# VP 22

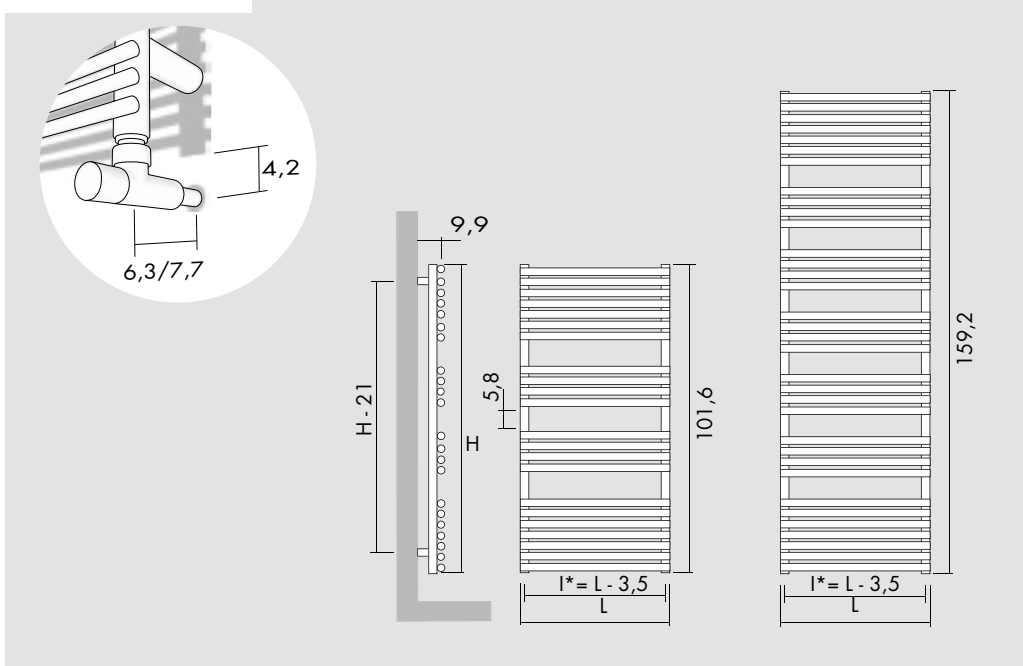


Kcal = Watt x 0.860  
BTU = Watt x 3.413

Watt Δt 60° = Watt Δt 50° x 1.238  
Watt Δt 40° = Watt Δt 50° x 0.770  
Watt Δt 30° = Watt Δt 50° x 0.550  
Watt Δt 20° = Watt Δt 50° x 0.342

p max = 10.0 bar

H cm	L cm	I* cm	art*	[B] STOCK	Lt*	watt Δt 30°	watt Δt 50°
101.6	43.5	40.0	<b>VP22043100</b>	STOCK	4.6	270	<b>491</b>
101.6	48.5	45.0	<b>VP22048100</b>	STOCK	4.9	301	<b>548</b>
101.6	53.5	50.0	<b>VP22053100</b>	STOCK	5.3	334	<b>607</b>
101.6	58.5	55.0	<b>VP22058100</b>	STOCK	5.6	363	<b>660</b>
159.2	43.5	40.0	<b>VP22043160</b>	STOCK	7.1	403	<b>733</b>
159.2	48.5	45.0	<b>VP22048160</b>	STOCK	7.7	449	<b>817</b>
159.2	53.5	50.0	<b>VP22053160</b>	STOCK	8.2	498	<b>906</b>
159.2	58.5	55.0	<b>VP22058160</b>	STOCK	8.7	542	<b>985</b>

Standard connection / Raccord standard  
Standard Anschluss / Conexión estándar

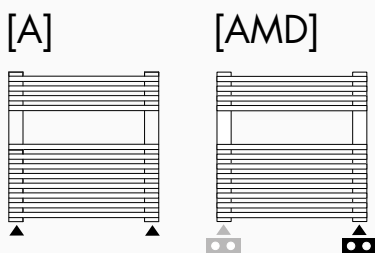

art\* = item / modèle / Artikel / artículo    I\* = pipe centres / distance entre depart et retour / Achsabstand / distancia entre las conexiones  
Lt\* = water content / volume d'eau / Wassergehalt / contenido de agua


Dual application with schuko plug / Version mixte avec prise schuko / Kombimodell mit Schukosteckdose / Versión mixta con enchufe schuko

H cm	L cm	I* cm	art*	[B] STOCK	Lt*	watt Δt 30°	watt Δt 50°	watt
101.6	43.5	32.5	<b>MC VP22043100</b>	STOCK	4.6	270	<b>491</b>	350
101.6	48.5	37.5	<b>MC VP22048100</b>	STOCK	4.9	301	<b>548</b>	500
101.6	53.5	42.5	<b>MC VP22053100</b>	STOCK	5.3	334	<b>607</b>	500
101.6	58.5	47.5	<b>MC VP22058100</b>	STOCK	5.6	363	<b>660</b>	700
159.2	43.5	32.5	<b>MC VP22043160</b>	STOCK	7.1	403	<b>733</b>	700
159.2	48.5	37.5	<b>MC VP22048160</b>	STOCK	7.7	449	<b>817</b>	700
159.2	53.5	42.5	<b>MC VP22053160</b>	STOCK	8.2	498	<b>906</b>	700
159.2	58.5	47.5	<b>MC VP22058160</b>	STOCK	8.7	542	<b>985</b>	1 000

Included



Heating element  
Résistance  
Heizstab  
Resistencia

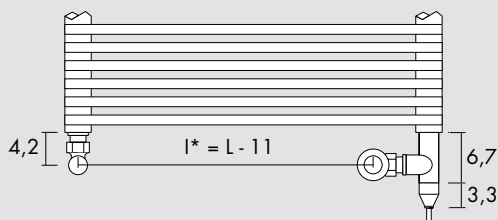

Optional



Receiver  
Récepteur  
Empfänger  
Receptor

**R10**



ECODESIGN

Digital chronothermostat  
Chronothermostat digital  
Der digital Chronothermostat  
Cronotermostato digital

**T11**

Dual electric element with thermostat / Mixte résistance avec thermostat / Kombimodell mit Raumthermostat / Versión mixta con termostato ambiente

H cm	L cm	I* cm	art*	[B] STOCK	Lt*	watt Δt 30°	watt Δt 50°	watt
101.6	43.5	32.5	<b>MT VP22043100</b>	STOCK	4.6	270	<b>491</b>	350
101.6	48.5	37.5	<b>MT VP22048100</b>	STOCK	4.9	301	<b>548</b>	500
101.6	53.5	42.5	<b>MT VP22053100</b>	STOCK	5.3	334	<b>607</b>	500
101.6	58.5	47.5	<b>MT VP22058100</b>	STOCK	5.6	363	<b>660</b>	700
159.2	43.5	32.5	<b>MT VP22043160</b>	STOCK	7.1	403	<b>733</b>	700
159.2	48.5	37.5	<b>MT VP22048160</b>	STOCK	7.7	449	<b>817</b>	700
159.2	53.5	42.5	<b>MT VP22053160</b>	STOCK	8.2	498	<b>906</b>	700
159.2	58.5	47.5	<b>MT VP22058160</b>	STOCK	8.7	542	<b>985</b>	1 000

Included




Thermostat / Thermostat  
Der Thermostat / Termostato  
[BIAN]  
[CROM]  
[NEOP]



ECODESIGN

Infrared remote control  
Télécommande infrarouge  
Infrarot-Fernbedienung  
Mando por infrarrojos

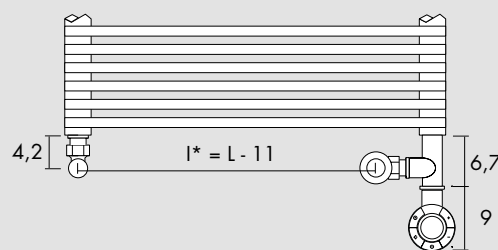

Optional



(P\* = 234)

Angled Valve  
Vanne équerre  
Eckausführung Ventil  
Válvula a escuadra


[BIAN] **E12SQB**  
[CROM] **E12SQR**



(P\* = 236)

Thermostatic head  
Tête thermostatique  
Thermostatkopf  
Cabezal termostático


[BIAN] **TTB**  
[CROM] **TTT**



(I\* = 5 cm)

Sleeving kit  
Kit couvre tuyau  
Rosetten  
Kit cubre tubo

[BIAN] **C5B**  
[CROM] **C5R**



Ø ≤ 16 mm  
[BIAN] **CTB**  
[CROM] **CTR**

16 mm < Ø < 24 mm  
[BIAN] **CWB**  
[CROM] **CWR**

art\* = item / modèle / Artikel / artículo I\* = pipe centres / distance entre depart et retour / Achsabstand / distancia entre las conexiones  
Lt\* = water content / volume d'eau / Wassergehalt / contenido de agua P\* = page / page / Seite / página