

H₂O Bath


UNI EN 442 Δt 50° 75°/65°/20° - Δt 30° 55°/45°/20°



Kcal = Watt x 0.860
BTU = Watt x 3.413

Watt Δt 60° = Watt Δt 50° x 1.247
Watt Δt 40° = Watt Δt 50° x 0.763
Watt Δt 30° = Watt Δt 50° x 0.539
Watt Δt 20° = Watt Δt 50° x 0.330


p max = 10.0 bar

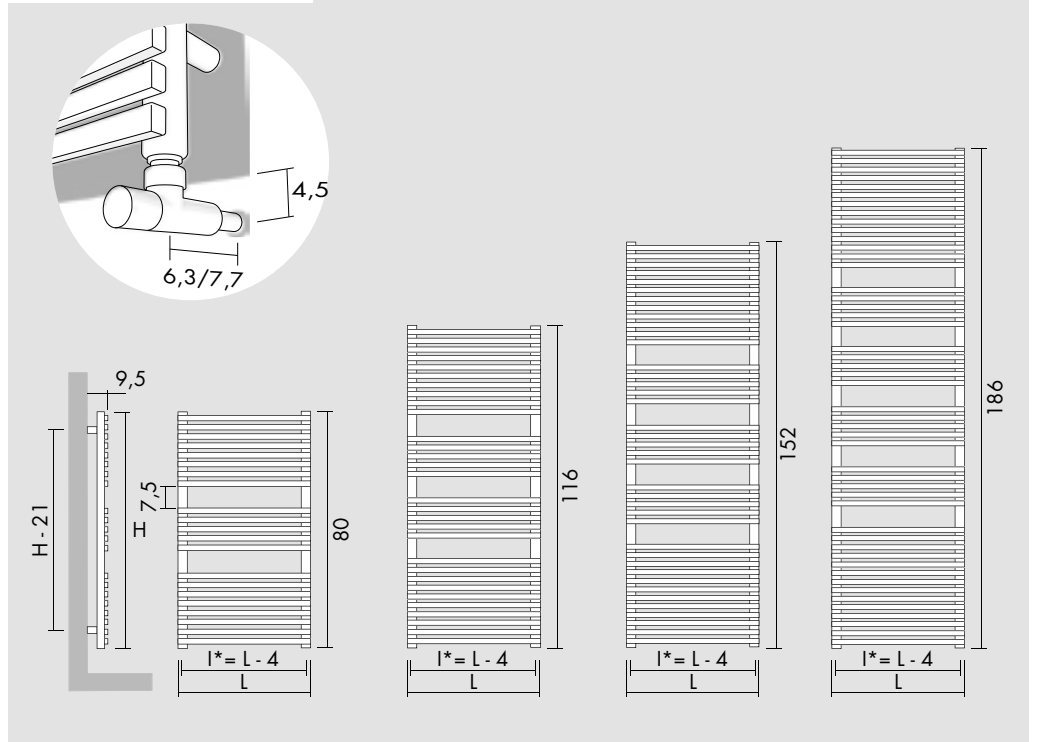


H cm	L cm	I* cm	art*	[B] STOCK	Lt*	watt Δt 30°	watt Δt 50°
80.0	40.0	36.0	HB20S040080	STOCK	3.1	180	334
80.0	50.0	46.0	HB20S050080	STOCK	3.6	224	416
80.0	60.0	56.0	HB20S060080	STOCK	4.0	267	495
116.0	40.0	36.0	HB20S040116	STOCK	4.5	258	479
116.0	50.0	46.0	HB20S050116	STOCK	5.1	319	592
116.0	60.0	56.0	HB20S060116	STOCK	5.8	379	704
152.0	40.0	36.0	HB20S040152	STOCK	5.9	332	616
152.0	50.0	46.0	HB20S050152	STOCK	6.7	410	761
152.0	60.0	56.0	HB20S060152	STOCK	7.6	488	906
186.0	40.0	36.0	HB20S040186	STOCK	7.2	410	761
186.0	50.0	46.0	HB20S050186	STOCK	8.3	498	924
186.0	60.0	56.0	HB20S060186	STOCK	9.3	593	1 100

watt Δt 30°	watt Δt 50°
122	227
153	283
181	336
175	325
217	403
258	479
226	419
279	518
332	616
279	518
338	628
403	748

Standard connection / Raccord standard
Standard Anschluss / Conexión estándar

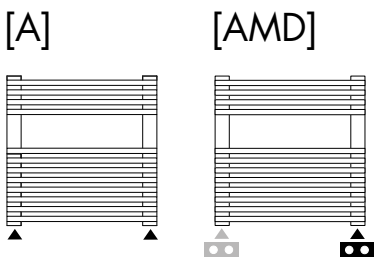

Special connection / Raccord spéciale / Speziell Anschluss / Conexión especial

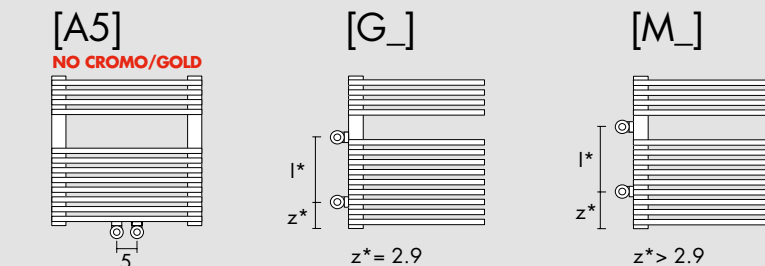

Replace _ with connection S (Left) or D (Right). / Remplacer le _ avec raccordement S (Gauche) ou D (Droite). / Um linker oder rechter Anschluss zu bestellen, bitte das Symbol _ mit S (links) oder D (rechts) ersetzen. / Sustituir el _ con las conexiones S (Izquierda) o D (Derecha).

art* = item / modèle / Artikel / artículo I* = pipe centres / distance entre depart et retour / Achsabstand / distancia entre las conexiones
Lt* = water content / volume d'eau / Wassergehalt / contenido de agua

Dual application with schuko plug / Version mixte avec prise schuko /
Kombimodell mit Schukosteckdose / Versión mixta con enchufe schuko


H cm	L cm	I* cm	art*	[B] STOCK	Li*	watt Δt 30°	watt Δt 50°	watt
80.0	40.0	29.5	MC HB20S040080	STOCK	3.1	180	334	350
80.0	50.0	39.5	MC HB20S050080	STOCK	3.6	224	416	350
80.0	60.0	49.5	MC HB20S060080	STOCK	4.0	267	495	500
116.0	40.0	29.5	MC HB20S040116	STOCK	4.5	258	479	500
116.0	50.0	39.5	MC HB20S050116	STOCK	5.1	319	592	500
116.0	60.0	49.5	MC HB20S060116	STOCK	5.8	379	704	700
152.0	40.0	29.5	MC HB20S040152	STOCK	5.9	332	616	500
152.0	50.0	39.5	MC HB20S050152	STOCK	6.7	410	761	700
152.0	60.0	49.5	MC HB20S060152	STOCK	7.6	488	906	700
186.0	40.0	29.5	MC HB20S040186	STOCK	7.2	410	761	700
186.0	50.0	39.5	MC HB20S050186	STOCK	8.3	498	924	1 000
186.0	60.0	49.5	MC HB20S060186	STOCK	9.3	593	1 100	1 000

watt Δt 30°	watt Δt 50°	watt
-	-	-
-	-	-
181	336	350
175	325	350
217	403	350
258	479	500
226	419	350
279	518	500
332	616	500
279	518	500
338	628	500
403	748	700

Included



Heating element
Résistance
Heizstab
Resistencia

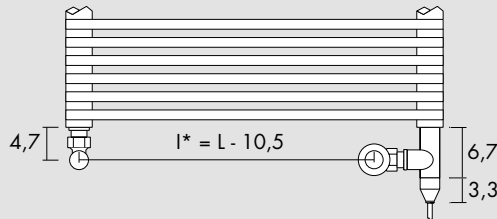

Optional



Receiver
Récepteur
Empfänger
Receptor

R10



Digital chronothermostat
Chronothermostat digital
Der digital Chronothermostat
Cronotermostato digital

T11

Dual electric element with thermostat / Mixte résistance avec thermostat /
Kombimodell mit Raumthermostat / Versión mixta con termostato ambiente

H cm	L cm	I* cm	art*	[B] STOCK	Li*	watt Δt 30°	watt Δt 50°	watt
80.0	40.0	29.5	MT HB20S040080	STOCK	3.1	180	334	350
80.0	50.0	39.5	MT HB20S050080	STOCK	3.6	224	416	350
80.0	60.0	49.5	MT HB20S060080	STOCK	4.0	267	495	500
116.0	40.0	29.5	MT HB20S040116	STOCK	4.5	258	479	500
116.0	50.0	39.5	MT HB20S050116	STOCK	5.1	319	592	500
116.0	60.0	49.5	MT HB20S060116	STOCK	5.8	379	704	700
152.0	40.0	29.5	MT HB20S040152	STOCK	5.9	332	616	500
152.0	50.0	39.5	MT HB20S050152	STOCK	6.7	410	761	700
152.0	60.0	49.5	MT HB20S060152	STOCK	7.6	488	906	700
186.0	40.0	29.5	MT HB20S040186	STOCK	7.2	410	761	700
186.0	50.0	39.5	MT HB20S050186	STOCK	8.3	498	924	1 000
186.0	60.0	49.5	MT HB20S060186	STOCK	9.3	593	1 100	1 000

watt Δt 30°	watt Δt 50°	watt
-	-	-
-	-	-
181	336	350
175	325	350
217	403	350
258	479	500
226	419	350
279	518	500
332	616	500
279	518	500
338	628	500
403	748	700

Included




Thermostat / Thermostat
Der Thermostat / Termostato
[BIAN]
[CROM]
[NEOP]



Infrared remote control
Télécommande infrarouge
Infrarot-Fernbedienung
Mando por infrarrojos

ECODESIGN

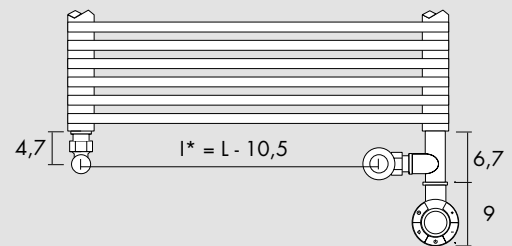

Optional




Angled Valve
Vanne équerre
Eckausführung Ventil
Válvula a escuadra

[BIAN] **E12SQB**
[CROM] **E12SQR**




Thermostatic head
Tête thermostatique
Thermostatkopf
Cabezal termostático

[BIAN] **TTB**
[CROM] **TTR**



Sleeving kit
Kit couvre tuyau
Rosetten
Kit cubre tubo

[BIAN] **C5B**
[CROM] **C5R**



Towel hooks
Paire de patère
Crochet das Bugel
Percha

[BIAN] **CWB**
[CROM] **CWR**



(2 pz.)
(P* = 230)

[INOX] **3A20X**